




## Roofing Solutions



Complete Systems Designed for the Roof Coating Contractor

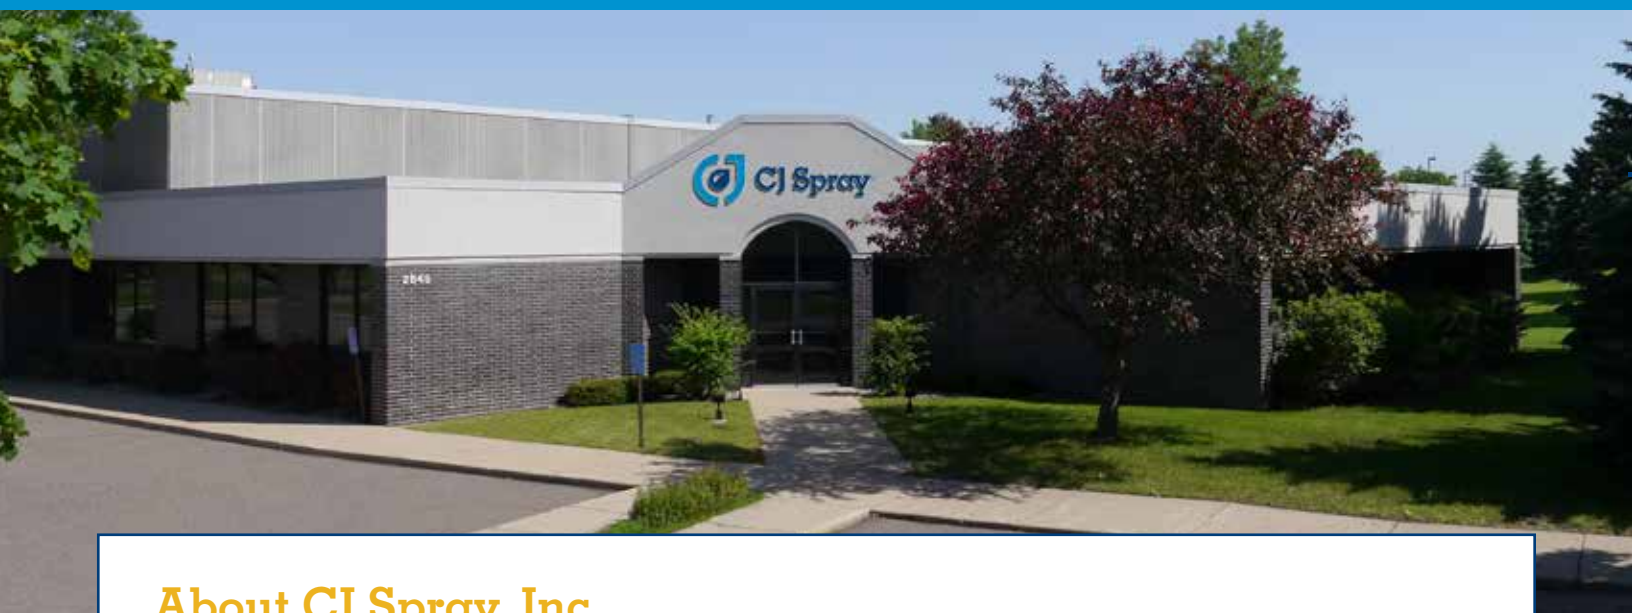

## About CJ Spray, Inc.

In 1995, CJ Spray started as a distributor/wholesaler of equipment to spray, meter, mix and dispense liquids servicing consumer, contractor and industrial markets.

We offer cost effective off-the-shelf solutions, or can design custom systems specific for your needs. After the sale we are here for training, service, and a huge parts inventory with same day shipping or delivery. For more information please visit [www.cjspray.com](http://www.cjspray.com).

## Markets Served



### Infrastructure

- Protective Coatings
- Mortar Repair
- Concrete Pumps
- Grout Injection



### Architectural Coatings

- Spray Foam
- Waterproofing
- Air Barrier
- Roof Coatings



### Roadways/Marking

- Bridge Coatings
- Pavement Marking
- Scarifying



### Architectural Painting

- Residential Painting
- Industrial Painting
- Consumer DIY



### Texture

- Drywall Mud
- FRP Manufacturing
- Acoustic Coatings
- Aggregated Products
- Fibrated Products
- Fireproofing



### Sealant & Adhesive

- OEM Manufacturing
- Crack Filling
- Seam Sealing
- FRP
- RIM



### Fine Finish Applications

- Porcelain Refinishing
- OEM Manufacturing
- Automotive
- Aviation
- Wood Finishing



### Surface Prep

- Abrasive Blasting
- Pressure Washing
- Sanding
- Tumble Cleaning

# Table of Contents

**3**

## **Wow! Roof Coatings are Thick!**

Cavitation and Solving Cavitation

**4-6**

## **MaxForce**

The Next Generation in Roofing Equipment

**7-8**

## **Graco Packages**

Heated and Non-Heated Packages

**9**

## **5-Gallon Pail Packages**

**10**

## **Accessories**

Graco Electric Sprayers

**11-12**

## **Co-Spray**

Spray a Multitude of Products in an Infinite Number of Applications

**13-14**

## **Accessories**

Guns, Hoses, Tip Extensions. We've got all the Accessories You Need!

**15**

## **Hose**

Options for hose and hose fittings

**16**

## **HVLP Airless**

Use in Place of a Pump-Up Sprayer


# Wow! Roof Coatings are Thick!

Roof Coatings are thick and becoming thicker. Airless pumps are great pushers, but often have a hard time loading with a heavy coating. Some materials can be siphoned directly from a 55-gallon drum, but many require help:

## Cavitation

If a material is too thick to siphon from a 55-gallon drum, your pump will cavitate. There are two signs that your pump is cavitating:

1. Fan pattern will pulse and hourglass
2. Pump moves slowly during upstroke but dives quickly on downstroke

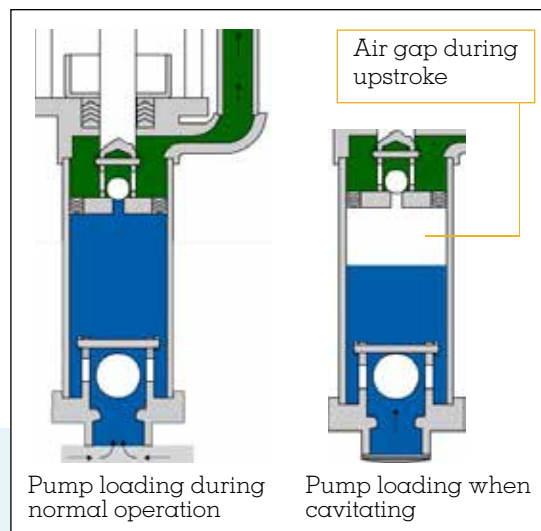

## Solving Cavitation w/ 55 Gallon Drums

Use a tank or tote that uses gravity and the weight of the material to load the pump. For more flexibility and when changing materials often, a 55-gallon drum is more convenient. Use an air operated feed pump to load the sprayer, however an air compressor is now required for its operation.



### Siphon from 55 Gallon Drum

Other than thin acrylics, most roof coatings cannot be siphoned without causing cavitation.



### Drum Tipping

Is dangerous, messy, inefficient and problematic to do correctly.



### Graco Direct Immersion

Pump is located on top of drum, not in the material, requiring it to siphon the coating up the suction tube.



### Specialty Direct Immersion

Must open lid of drum. Pump goes into material making cleanup difficult. Pump does not go all the way to the bottom of the drum so it still has to siphon as it empties.



## 55 Gallon Feed Pump

- No need to remove drum lid. Pump mounts in 2" bung opening of drum lid.
- Smooth pump housing makes cleanup easy
- Pump goes all the way to the bottom of the drum - no siphoning, just pushing
- Pump is pneumatically powered so a small air compressor is required
- **MaxForce AC Series** has integrated air compressor to operate feed pump

### Common Models

**Graco T2/T3** - Acrylics, Urethanes

**Graco Monark 5:1** - Urethanes, Silicones

# MAXFORCE

## AC Series

### AC Series

### Integrated Air Compressor to Operate 55 Gal Drum Feed Pump

## MaxForce AC Series Integrates Air Compressor for Operating 55-Gallon Drum Feed Pump

Designed with the commercial contractor in mind spraying roof coatings from 55-gallon drums. The MaxForce AC Series use large gas or electric driven hydraulic pumps that also operate an air compressor for the feed pump. These new compact packages are easy to move around a job site. Built in fly hooks, fork pockets and no flat tires give contractors many options in the field. Built in tie down brackets make it easy to secure during operation or installing into a truck or trailer.

#### Hose Reel

Air powered hose reel runs off on board air compressor. Small foot print with large hose capacity.

#### Feed Pump

Force feed even the thickest coatings with Graco's T3 or Monark Feed Pump

#### Nachi Pump

No electronics or mechanical clutches. Uses same pump found on time tested Graco GH733.

#### Hydraulic Head & Lower

Speeflo's proven 12000 Series hydraulic pump and lower providing 2.0 GPM @ 4,000 psi

#### Engine


Honda's proven 13 Hp Gas powered motor

#### Compressor

Integrated air compressor with moisture trap and coalescing filter provides clean/dry air to feed pump and hose reel

#### Custom Cart

Over 50% smaller footprint than comparable skid-mounted units.

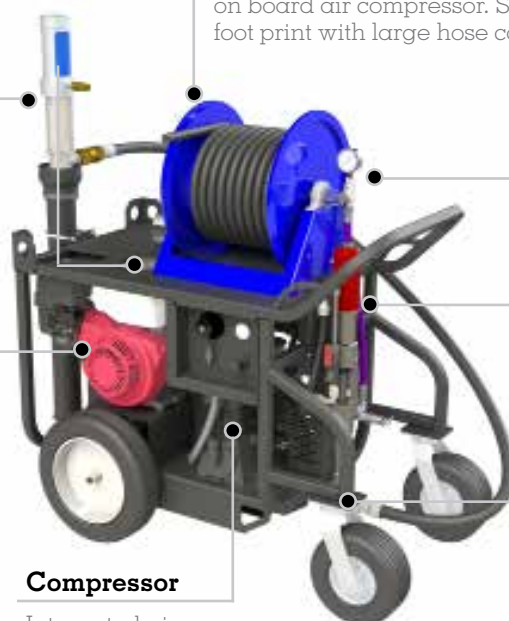

# MAXFORCE

## AC Series

### GH4030AC/GH6520AC:

For the most demanding contractor that needs high pressure and flow, the MaxForce GH4030AC and GH7020AC utilize Graco's time tested Viscount II Hydraulic motor and Extreme Lowers. Powered by large twin cylinder Kohler engines you will not find a more powerful sprayer in the field.

- GH4030AC: 4,000 psi, 3.0 gpm, No Heat
- GH6520AC: 6,500 psi, 2.0 gpm, No Heat
- Integrated 13.1 CFM Air Compressor for use with Graco T3 (GH4030AC) or Monark 5:1 (GH6520AC) Feed Pump
- Electric Hose Reel for up to 300 ft spray hose (GH4030AC only)
- Dimensions: 31" w x 51" long x 56" tall
- 18 HP Twin Cylinder Air-Cooled motor
- Optional Calcium Chloride (Co-Spray) kit

#### Ordering Information

**T10449-00** GH4030AC, T3 Stick Pump, 200' Hose (100 x 1/2, 100 x 3/8), HD Texture Gun, HD Swivel, XHD Tip and Guard

**T10449-70** GH6520AC, Monark 5:1 Stick Pump, 260' Hose (200 x 3/4, 50 x 1/2, 10 x 3/8), Binks 75 Gun, HD Swivel, 18" High Pressure Gun Extension, 180° Swivel, XHD Tip and Guard



### GH4020AC:

The ideal pump for spraying acrylic roof coatings. The 2.0 gpm pump is more than capable spraying up to a .047 tip. Larger 3.0 gallon per minute pumps became popular because contractors needed them for the increased suction from a 55 gallon drum. Using a feed pump eliminates that need and provides a smaller more portable system.

- GH4020AC: 4,000 psi, 2.0 gpm, No Heat
- Integrated 13.1 CFM Air Compressor for use with Graco T3 Feed Pump
- Pneumatic Hose Reel for up to 300 ft spray hose
- 13 HP Single Cylinder Air-Cooled Honda motor
- Optional Calcium Chloride (Co-Spray) kit
- Dimensions: 31" w x 51" long x 56" tall
- Weight: 610

#### Ordering Information

**T10443-00** GH4020AC, T3 Stick Pump, 200' Hose (100 x 1/2, 100 x 3/8), HD Texture Gun, HD Swivel, XHD Tip and Guard



## Electric EH4020ACH/EH4030ACH/EH6520AC:

Experience the reliability of electric motors. The EH Series requires a small gas driven generator that many contractors already own for their welding machines. Integrated electric heat system helps warm material so you can spray at lower pressures and extend your spray season.

- EH4020ACH: 4,000 psi, 2.0 gpm, with Heat
- EH4030ACH: 4,000 psi, 3.0 gpm, with Heat
- EH7020AC: 6,500 psi, 2.0 gpm, no Heat
- Integrated 6.5 CFM Air Compressor for use with Graco T3 Feed Pump
- Electric Hose Reel for up to 200 ft of insulated and scuff jacketed spray hose (ACH models only)
- 5 HP (4020) or 10 HP (4030/6520) Electric 230 V, 1-PH Motor
- Intuitive control panel for easy operation
- 4020/4030 Digital heat control is "set and forget"
- Optional Calcium Chloride (Co-Spray) kit (4020/4030)
- Dimensions: 31" w x 51" long x 56" tall
- Weight: 755



### Ordering Information

**T10442-00** EH4020ACH, T3 Stick Pump, 200' Scuff Jacketed/Insulated Hose (100 x 1/2, 100 x 3/8), HD Texture Gun, HD Swivel, XHD Tip and Guard

**T10442-01** EH4030ACH, T3 Stick Pump, 200' Scuff Jacketed/Insulated Hose (100 x 1/2, 100 x 3/8), HD Texture Gun, HD Swivel, XHD Tip and Guard

**T10442-02** EH6520AC, T3 Stick Pump, 260' Hose (200 x 3/4, 50 x 1/2, 10 x 3/8), Binks 75 Gun, HD Swivel, 18" High Pressure Gun Extension, 180° Swivel, XHD Tip and Guard (no reel)

## Power Requirements

### EH4020ACH

- When using heater: 50 Amps, 230 V, 1-PH
- When not using heat: 39 Amps, 230 V, 1-PH
- Recommended generator: 12kW

U90721

### EH4030ACH/EH7020AC

- When using heater: 68 Amps, 230 V, 1-PH
- When not using heat: 55 Amps, 230 V, 1-PH
- Recommended generator: 18kW

U90717



## GH833 Acrylic and Urethane Packages



### 55 Gallon Suction Package

The Premium Package includes all the necessities from the basic package, but also includes the accessories to increase production and protect your investment. The skid frame makes the system portable and comes completely assembled.

- Proven 13 HP Honda engine
- Electric Start
- 150 ft high-pressure spray hose
- Electric hose reel
- Graco Heavy Duty Texture Gun (less restrictive than Silver Plus)
- Pressure gauge
- 4,000 PSI, 4.0 GPM
- Upgraded Pressure Relief Valve



#### Other Specs:

**Tip Size:** 1 gun to .065 tip,  
2 guns to .046 tip,  
3 guns to .037 tip  
**Weight:** 426 lbs  
**Warranty:** 3 years  
**Hose:** 300 ft. **Maximum**  
**Dimensions:** Width: 27",  
Height: 45.5", Length: 44"

#### Ordering Information

**SB83302** GH833 Non-Heated Premium Package

**SB83302C** GH833 Non-Heated Premium Package w/ Co-Spray



### 55 Gallon Supply Pump Packages

The Premium Package w/ T2 Transfer Pump includes all the necessities from the basic package, but also includes the accessories to increase production and protect your investment. when spraying even the most difficult coatings. The skid frame makes the system portable and comes completely assembled and the T2 allows thick coatings to be fed from 55-gallon drums.

- Proven 13 HP Honda engine
- Electric Start
- 200 ft high-pressure spray hose
- Electric hose reel
- Graco Heavy Duty Texture Gun (less restrictive than Silver Plus)
- Pressure gauge
- 4,000 PSI, 4.0 GPM
- Graco T2 Transfer Pump w/ 10' Supply Hose
- Upgraded Pressure Relief Valve

#### Other Specs:

**Tip Size:** 1 gun to .065 tip, 2 guns to .046 tip,  
3 guns to .037 tip **Weight:** 426 lbs  
**Warranty:** 3 years **Hose:** 300 ft. **Maximum**  
**Dimensions:** Width: 27", Height: 45.5", Length: 44"

#### Ordering Information

**SB83304** GH833 Non-Heated Premium Package w/ T2 Pump

**SB83309** GH833 Non-Heated Premium Package w/ Monark Pump

# GH933 Silicone Package



## Ordering Information

**T10829-01** GH933 1/2" Hose Package for Synthetics

**T10829-00** GH933 3/4" Hose Package for Traditional Coatings

## Graco GH933 Spray Package

High pressure (7,250 psi) system allows for spraying silicones and urethanes with long hose lengths. New synthetic coatings allow for using 1/2" hose. Traditional silicones should use 3/4" I.D. hose.

- Proven 13 HP Honda engine
- 7,250 psi, 2.5 gpm
- Monark 5:1 Feed Pump w/ storage holster
- 250' hose
- Binks high pressure gun w/ Graco XHD tip
- 18" high pressure tip extension
- 180 high pressure tip swivel

**Other Specs:** Tip Size: 1 gun to .065 tip, 2 guns to .046 tip, 3 guns to .037 tip Weight: 426 lbs  
Hose: 300 ft. Maximum Warranty: 3 years  
Dimensions: Width: 27", Height: 45.5", Length: 44"



## Ordering Information

**S90020-14** Air Compressor w/ Air Dryer, MI-T-M, Gas, Twin Tank

**S90060-20** Air Dryer Kit to install on your compressor

## Air Compressors

All supply pumps require an air compressor to operate. This gas-powered MI-T-M compressor provides enough CFM for any supply pump including Graco's Monark 5:1.

Integrated air regulator to adjust supply pump fluid pressure.

CJ Spray installs a high quality moisture trap and oil coalescing filter to prevent moisture freeze up in the supply pump's air motor.



# 5-Gal Pail Packages

## Graco GMAX II 7900 5-Gallon Pail Packages



### ProContractor Package - Acrylics

The GMAX II 7900 is Graco's largest gas mechanical operated sprayer. The mechanical clutch design efficiently transfers power from the reliable Honda engine to provide the most bang-for-your-buck. This proven design is backed by a lifetime drive-train warranty.

When using thinner materials, siphon directly from 55-gallon drums. Also works with higher viscosity materials when using 5-gallon pails. Works great for touch-up and small jobs.

- Proven 6.5 HP Honda engine
- ProConnect Pump System for easy field service
- Integrated hose reel
- 100 ft high-pressure spray hose
- Silver Plus spray gun
- 3,300 PSI, 2.3 GPM

#### Ordering Information

**17E837** GMAX II 7900 ProContractor

#### Other Specs:

**Tip Size:** 1 gun to .048 tip, 2 guns to .035 tip, **Weight:** 167 lbs **Hose:** 200 ft. **Maximum**

**Warranty:** 3 year, 1 year motor, lifetime drive train

**Dimensions:** Width: 24.4", Height: 40.5", Length: 33.3"



### DutyMax GH 675di - Silicone

The new GH 675di is ideal for contractors spraying silicone from 5-gallon pails. High pressure (6,750 psi) allows spraying silicones with up to 200' of hose and a dropped inlet housing to the bottom of a 5-gallon pail, eliminates cavitation.

- Graco DutyMax GH 675di
- 150 ft high-pressure spray hose
- XTR-7 HF spray gun w/ XHD 523, 527, 531
- 18" Tip Extension w/ 180° Tip Swivel
- Xtreme style inlet housing makes adding a feed pump for a 55-gallon drums easy

#### Ordering Information

**25D225** GH675di Big 150 Package

#### Other Specs:

**Max Pressure:** 6,750 psi

**MaxFlow:** 1.5 gpm **Tip Size:** 1 gun to .041 tip **Weight:** 230 lbs

**Hose:** 200 ft. **Maximum**

**Warranty:** 3 year, 1 year motor, lifetime drive train

**Dimensions:** Width: 48" x Length: 66"

## These accessories solve:

### Bad Pattern

A bad spray pattern is caused by a lack of spray pressure. Pumping long distances or using underpowered pumps are typically the cause. If you cannot create a good spray pattern, you can always roll.

### Overspray

When overspray is a major concern these accessories help.

## Roof Coating Dispense Bar w/ Optional Roller Attachment

- When overspray is a concern or there is not enough pressure to atomize a fan pattern the dispense bar is a great option
- Production rates similar to spraying
- Adjustable shoes allow operator to adjust height of the dispense bar to different roof substrates
- Optional roller attachment can reduce backrolling to 1-man operation
- Works well with silicones, urethanes and acrylics



PN #510686-40

## Heavy-Duty 18" JetRoller™

**One Step Spray & Back Roll With Less Overspray Than Conventional Airless Spray!**

- Combines the speed of spray with the simplicity of rolling
- Fits 9-18" Standard Roller Covers
- Pressure rated to 7250 psi
- Perfect for windy areas

PN #24W128



## High Viscosity Pressure Roller

This roller is not the same if you've tried one from the local paint store. It is designed for viscous coatings and is solvent resistant. Three inches wider (12") than paint pressure rollers for faster application.



- Ideal when overspray is a major concern such as high winds or urban environments
- Works well with materials that have poor sheer and do not atomize spray patterns well, such as STPE or silicone
- 1/2" and 3/4" naps available

### Ordering Information

**S10439-00** 12" HV Roller assembly with 20" HD extension and inline valve

**232123** 40" heavy duty tip extension (replace 20" extension w/ 40" extension or screw together for 60" of reach)

**186944** 1/2" Nap Roller

**186945** 3/4" Nap Roller

# Co-Spray

New acrylic roof coating are entering the market that utilize a calcium chloride injection to help quick-set the material. This allows the applicator to apply more mils per pass and is wash-off resistant on inclement weather approaches.

## MaxForce 2050AC w/ Co-Spray

The new 2050AC with Co-Spray is ideal for materials that are shear sensitive. The huge two ball piston pump strokes very slow ensuring smooth delivery of the material. The Honda engine provides power to the hydraulic pump and air compressor which powers the Co-Spray's diaphragm pump and an agitator for the roofing material.

- Built-in air compressor
- 200 ft high-pressure spray hose
- Pneumatic diaphragm pump
- Graco Twistork Agitator
- Pneumatic hose reel
- Optional second gun kit

### Other Specs:

**Max Pressure:** 2,000 psi

**MaxFlow:** 5.0 gpm **Weight:** 430 lbs

**Hose:** 300 ft. **Maximum**

**Warranty:** 1 year

**Dimensions:** Width: 31" x Length: 51" x Height 56"



### Ordering Information

**T10448-00** MaxForce 2050AC w/ Co-Spray

## Co-Spray Guns

Part No	Description
SB246240	Co-Spray Gun, Pistol
SB246241	Co-Spray Gun, Roofing Wand



## Tip Extensions

Part No	Description
S10455-00	Co-Spray Extension Kit (does not include Heavy Duty Tip Extension)

### Heavy Duty Tip Extensions

Part No	Description
232121	10"
232122	20"
232123	40"
232124	60"
232125	80"



# Utilize Graco's Patented XHD Tips

## Co-Spray Tip Combinations

Combinations are approx. 12:1 ratio. For faster break, reduce airless tip orifice or increase catalyst tip orifice.

Airless Tip 4-6" Fan	Catalyst Tip 4-6" Fan
XHD327	6501
XHD329	6501
XHD331	6501
XHD333	6501
XHD335	6502
XHD337	6502
XHD339	6502
XHD341	6502
XHD343	6502
XHD345	6503
XHD347	6503
XHD351	6503
XHD355	6503

Airless Tip 8-10" Fan	Catalyst Tip 4-6" Fan
XHD527	9501
XHD529	9501
XHD531	9501
XHD533	9501
XHD535	9502
XHD537	9502
XHD539	9502
XHD541	9502
XHD543	9502
XHD545	9502
XHD547	9503
XHD549	9503
XHD551	9503
XHD553	9503
XHD555	9503
XHD557	9503
XHD561	9503
XHD565	9503
XHD567	9503
XHD571	9503
XHD575	9503



Part Number	Description
XHD001	XHD Tip Guard
XHD010	Tip Seal, 5 pk

## Co-Spray Catalyst Tips

Part Number	Tip Size
H1/8VV-SS6501	6501
H1/8VV-SS6502	6502
H1/8VV-SS6503	6503
H1/8VV-SS9501	9501
H1/8VV-SS9502	9502
H1/8VV-SS9503	9503

## Breaking the Code

**XHD - 327**

First digit when doubled, is spray pattern fan width. A 327 has a 6-inch fan width when sprayed 12 inches from surface.

Last two digits are orifice size in thousandths of an inch, a 327 has a 0.027 inch orifice.

$$3 \times 2 = 6$$

Buy XHD Tips online at  
[www.cjspray.com/xhd](http://www.cjspray.com/xhd)

## Co-Spray Hose

Part No	Description
S10650-00	5/16 x 10' Co-Spray Hose with nickel plated fittings, 1/4 Female x Female
S10651-00	5/16 x 25' Co-Spray Hose with nickel plated fittings, 1/4 Female x Female
S10652-00	5/16 x 50' Co-Spray Hose with nickel plated fittings, 1/4 Female x Female
S10653-00	5/16 x 100' Co-Spray Hose with nickel plated fittings, 1/4 Female x Female
S10654-00	5/16 x 150' Co-Spray Hose with nickel plated fittings, 1/4 Female x Female
S10655-00	5/16 x 200' Co-Spray Hose with nickel plated fittings, 1/4 Female x Female

# Accessories

Waterproofing materials are thick. Airless pumps are great pushers, but often have a hard time loading with a heavy coating. Some materials can be siphoned directly from a 55-gallon drum, but others require help:

## 55 Gallon Feed Pump Kits

Supply viscous materials direct from 55-gallon drum to large airless pump with an air-operated feed pump. Kits include feed pump specified w/ 1" x 10' material hose and inline swivel.

Part No	Description
S10448-06	Graco Fast-Flo 1:1 kit, 7 cfm @ 100 psi
S10446-06	Graco T2 2.25:1 kit, 12 cfm @ 100 psi
S10447-06	Graco T3 3:1 kit, 12 cfm @ 100 psi
S10443-06	Graco Monark 5:1 kit, 15 cfm @ 100 psi
412723-1000x10	1" x 10ft NR spray supply hose



## Poly Tanks

Gravity will help load the pump with thick materials. Remember that material must be flowable at ambient temperature.

Part No	Description
515-501-275R	275 Gallon, reconditioned, 40" W x 48" L x 45.5" H



## Transfer Pumps

Transfer material from manufacturer's shipped container into your rigs mounted tank. Package includes 1" x 15' transfer hose, inline swivel and dispense valve. Husky 1050 package also includes 1.5" x 5' supply hose w/ 2" female camlock.

Part No	Description
S10421-00	Graco Fast-Flo 1:1 drum to tote transfer kit
S10422-00	Graco T1 2:1 drum to tote transfer kit
S10423-00	Graco T2 2.25:1 drum to tote transfer kit
SB647673	Graco Husky 1050 tote to tote transfer kit



## Pale/Drum Heaters

Heat materials in container to prevent cavitation and pressure loss making a better fan pattern in cold weather.

Part No	Description
16U623	Band Heater, 5 gallon, 110V, with thermostat
D80100-55	Arctic Warmer Blanket



## Guns

Part No	Description
241705	HD Texture Gun
246240	Silver Plus Gun
SB246240	Co-Spray Gun
24C857	G40 HiFlo Air-Assisted Airless Gun
236987	HD Swivel
189018	Standard Swivel



## Heavy-Duty Tip Extensions

Part No	Description
232121	10", 3,600 psi pressure rated
232122	20", 3,600 psi pressure rated
232123	40", 3,600 psi pressure rated
232124	60", 3,600 psi pressure rated
232125	80", 3,600 psi pressure rated
246297	180° Heavy-Duty Tip Swivel, 7,250 psi pressure rated



## Hose Reels

Part No	Description
K01-0106	Hand crank 18" painted steel, max 200ft un-insulated hose
K01-0108-1	Hand crank 24" stainless steel, max 200ft insulated hose
HP1125-4-200-E	Electric 18" painted steel, max 200ft un-insulated hose
HP1125-4-200-A	Electric 24" painted steel, max 200ft insulated hose
HP1125-4-450-E	Air operated 24" painted steel, max 200ft insulated hose
HP1125-4-450-A	Electric 24" painted steel, max 200ft insulated hose
HP1275-4-200-E	Dual line electric operated 24" painted steel, max 200ft insulated hose
HP1275-4-200-A	Dual line air operated 24" painted steel, max 200ft insulated hose
HP1275-6-200-A	Dual line air operated 24" large painted steel, max 200ft insulated hose



# Hose

Graco high pressure airless paint hose uses a solvent resistant nylon core with polyurethane cover to prevent abrasion and moisture penetration.

Part No	Description
277249	1/4" x 3' Whip Hose (Blue 4000 PSI)
H43803	3/8" x 3' Whip Hose (Purple 4500 PSI)
H43806	3/8" x 6' Whip Hose (Purple 4500 PSI)
H43810	3/8" x 10' Whip Hose (Purple 4500 PSI)

Part No	Description
240796	3/8" x 25' Blue 3300 PSI Hose (Use with GMAX 7900 Only)
240797	3/8" x 50' Blue 3300 PSI Hose (Use with GMAX 7900 Only)
241275	3/8" x 100' Blue 3300 PSI Hose (Use with GMAX 7900 Only)

Part No	Description
H43825	3/8" x 25' Purple 4500 PSI 3/8"
H43850	3/8" x 50' Purple 4500 PSI 3/8"
H4381X	3/8" x 100' Purple 4500 PSI 3/8"

Part No	Description
H45010	1/2" x 10' Purple 4500 PSI Hose - often used as jumper hose from pump to reel
H45050	1/2" x 50' Purple 4500 PSI Hose
H4501X	1/2" x 100' Purple 4500 PSI Hose

Part No	Description
H77550	3/4" x 50' Black, Graco 7250 PSI Hose
2120UKX-50	3/4" x 50' Black, after market 7250 PSI Hose
2120UKX-1X	3/4" x 100' Black, after market 7250 PSI Hose



## Hose Fittings

Part No	Description
HN38	3/8" Male x 3/8" Male NPSM Nipple
HN50	1/2" Male x 1/2" Male NPSM Nipple
HRN3850	3/8" Male x 1/2" Male NPSM Reducing Nipple
HRB2538	1/4" Female x 3/8" Male NPSM Reducing Bushing
236987	High pressure inline swivel, 1/4" F (s) x M npsm, 7,250 psi



Questions? Need Assistance? Call us toll-free at 1-888-CJSPRAY (257-7729)

Use in place of pump-up sprayer



#### Typical Materials Sprayed:

- Cure & Seals
- Concrete Sealers
- Water Repellents
- Hardener Densifiers
- Form Release
- Mold Inhibitors

Greatly increase productivity when spraying thin viscosity liquids with similar consistencies to water. CJ Spray's lineup of low-pressure spray packages create very little overspray, are easy to use and require little to no maintenance. Significantly increase output and reduce worker fatigue when compared to pump-up sprayers. Reduce downtime and waste using larger container sizes.

## Electric Operated HVLP Airless

Electric sprayer is capable of spraying one gun. Comes mounted on three wheel cart with 20-gallon tank.

Part No	Description
T10620-00	12V 3-wheel Cart, 20 gal
T10621-00	110V 3-wheel Cart, 20 gal



## Triton Air Operated Sealer Pumps

CJ Spray's air operated sealer pumps are capable of spraying two guns at one time. 4 cfm per gun.

Part No	Description
T10600-00	Triton 4-legged frame for 5-gallon Pails
T10601-00	Triton 55-gallon Drum Bung Mount
T10602-00	Triton Hang Mount for large Poly Totes
T10603-00	Triton 3-wheel Cart w/ 20-gallon Tank



## Air Compressors

Electric operated air compressor supplies enough air for two operators running on a single Triton Pump.

Gas operated air compressor supplies enough air for four operators running on two Triton Pumps.

Part No	Description
U90061	Ingersoll Rand 2 HP Twin Tank Electric Compressor, 4.3 cfm @ 90 psi
AMI-PH65-08M	Mi-T-M 5 HP Wheelbarrel Twin Tank Gas Compressor, 11.8 cfm @ 90 psi



\*Add the air atomizing kit to spray textured patterns for applications such as Orange Peel and Knockdown.



CJ Spray • 2845 W Service Rd • Eagan, MN 55121  
1-888-CJSPRAY (1-888-257-7729) • customerservice@cjspray.com • www.cjspray.com



Spray Foam  
Waterproofing  
Roofing  
Sealant  
Fireproofing

CJ Spray has specialized in equipment to spray roof coatings since 1995. Our packages are designed to be cost effective solutions that provide the maximum productivity and durability.

**SALES** - CJ Spray is a full service company specializing in equipment to spray and apply fluids. From off-the-shelf solutions to fully customized and integrated solutions, we can configure equipment to fit your needs.

**RENTAL** - Our large rental fleet of spray equipment (single and plural component) and abrasive cleaning is ready whenever you need it.

**SERVICE** - CJ Spray eliminates downtime and keeps your equipment up and running with factory certified technicians and one of the nation's largest inventory of parts and equipment. Technical support is available in-house, on-site and over the phone.

**SUPPORT** - Starting with concept and design, through implementation and training, continued with service and technical support; partner with CJ Spray to help build your competitive advantage.